



### OVERVIEW

The LCD Touch Screen Switch for the NexLight 2-Wire Lighting Control System provides elegant and sophisticated user controls to any NexLight 2-Wire controlled building. It provides easy to use and configure graphic buttons for Individual, Group, Pattern and Scene ON/OFF and Dimming control.



### FEATURES

- 4" Full Color Touch Screen (Diagonal)
- Attractive, architecturally-pleasing design
- Easy to use Windows-based Software for programming/editing screens and buttons
- Operates using the 2-Wire Bus only
- All Programming stored and read through onboard memory
- Up to 8 pages available per touch screen
- Up to 24 buttons/text fields per page
- Installs in single gang switch box


### SPECIFICATIONS

Size:	4.724"H x 2.756"W x 1.642" (Overall)
	(120mm x 70mm x 41.7mm)
Weight:	4 oz
LCD:	4" TFT LCD Capacitive Type
	Projective Capacitive Touch
	LED Backlight
Mounting:	Single Gang Switch Box
Input Signal:	±24VAC
	33 mA
Operating Temp:	14 to 131°F (-10 to 55°C)
Backup Memory:	Onboard memory
Programming:	Via TLS4 Editor

### EXAMPLE SCREENS

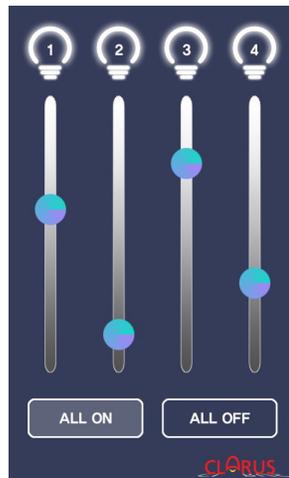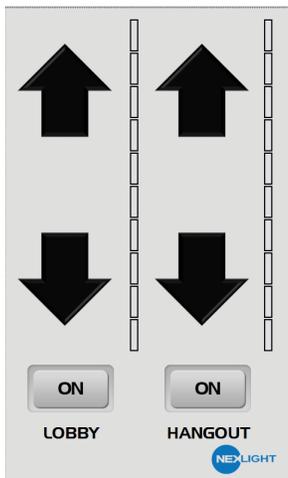

## DIMENSIONS

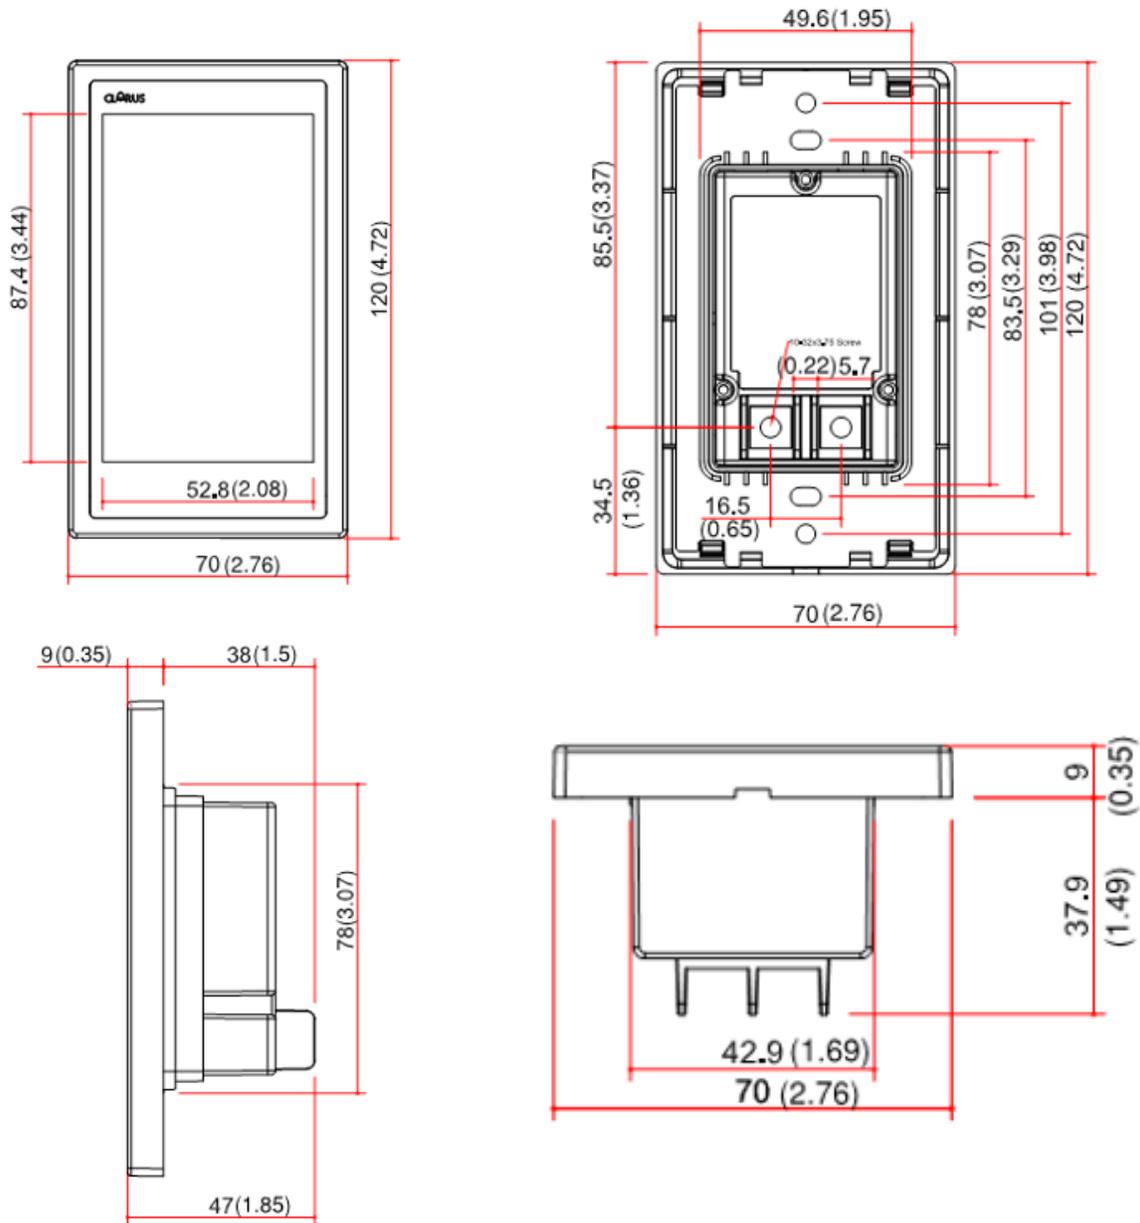

The dimensions are labeled in mm (inches) and are the same across all models.

## ORDERING INFORMATION

Part Number	Description
CRC3305-W	2-Wire LCD Touch Screen White with Square Edge
CRC3305-B	2-Wire LCD Touch Screen Black with Square Edge
CRC3325-W	2-Wire LCD Touch Screen White with Round Edge
CRC3325-B	2-Wire LCD Touch Screen Black with Round Edge

**\*\*NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**