


ELV DIMMING CONTROL DETAIL



NOTE: IF FLICKERING OCCURS; ADJUST THE "LO" TRIM LEVEL ON THE CRC4214 CLOCKWISE UNTIL THE LOAD OUTPUT BECOMES STABLE. THE ADJUSTMENT SHOULD BE AS MINIMAL AS POSSIBLE TO RETAIN BOTH A STEADY LIGHT OUTPUT AND PRESERVE MAXIMUM DIMMING RANGE.

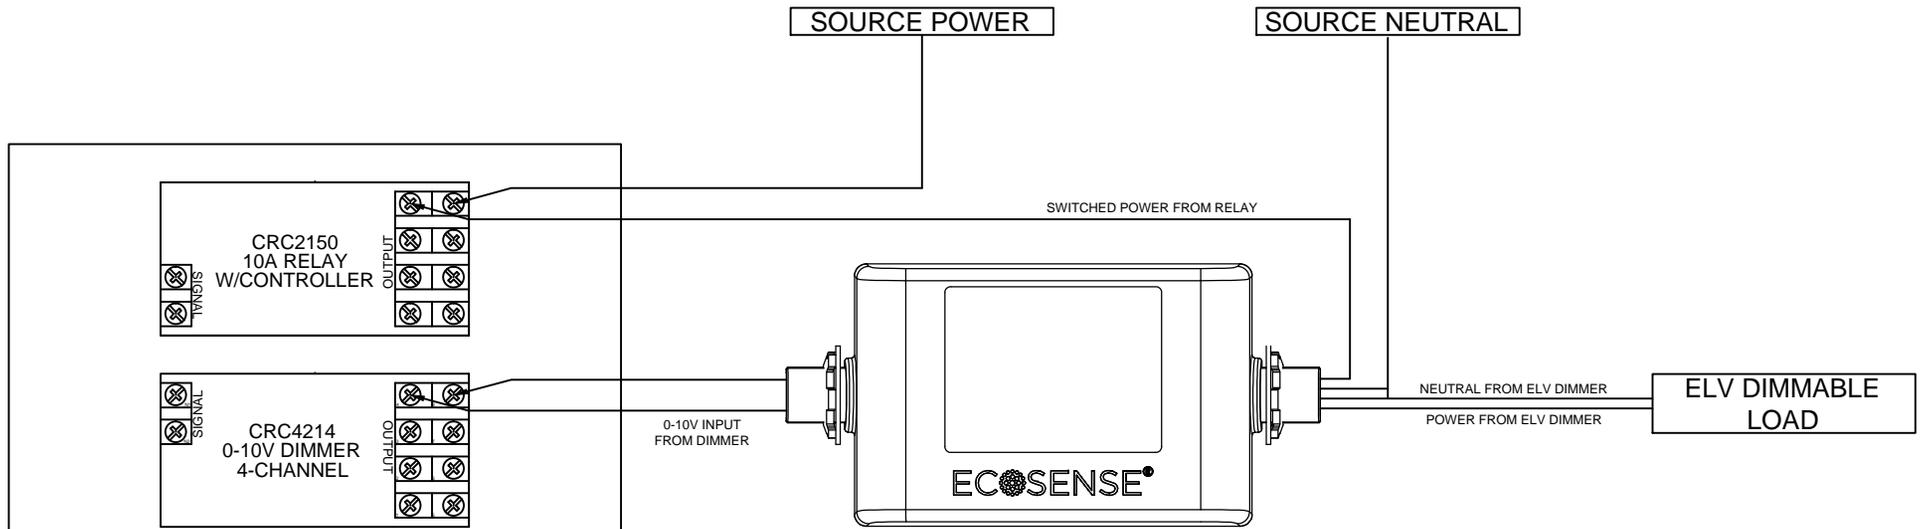

7877 College Rd Suite 105
 Baxter, MN 56425
 Ph: 218-828-3700
 Fax: 218-824-1568
 www.nexlight.com

JOB NAME: ELV DIMMING CONTROL DETAIL			Scale: NTS	Rev #:
DATE:	DRAWN BY: ERIK LINDROTH	DESCRIPTION: WIRING DIAGRAM; REVERSE PHASE LINE VOLTAGE DIMMING	Job #:	Pg #:

If this file has been transmitted electronically, the original is in the office of Nexlight. The electronic document was released by Nexlight for a specific use. No other use or modification may be made without the written consent of NexLight. All instruments of service, including original drawings, and specifications prepared by NexLight shall remain the property of NexLight and may not be used for any purposes not specifically agreed to in writing by NexLight. All reproductions of the instruments of service supplied to the owner may be used by the owner for any purposes related to the subject property. In the event that any changes are made in the plans and/or specifications by the owner or persons other than Nexlight, any and all liability arising out of such changes shall be full responsibility of the owner unless owner has received NexLight's written consent for such changes.