



## D SERIES DIMMING PANEL

### OVERVIEW

The NexLight™ D Series dimming control panel provides control of lighting loads using world class 20A mechanically latching relays for ON/OFF control and CRC4214 dimming units that provide up to 100 mA (sinking current) of dimming per channel. These lighting control panels come in a NEMA/Type 1 (3R available) enclosure and are factory wired in NexLight's UL508A shop. NexLight panel mounted system components are controlled via a dual processor CPU with an astronomical timeclock function. The easy-to-use Graphic User Interface (GUI) may be accessed through a Personal Computer (PC) for real-time programming, monitoring, and override of controlled loads on the NexLight system. The scheduling function is also accessed through the GUI and provides the end user with full control of the system whether on-site or from a remote location. Networking multiple panels together using the global addressing feature provides seamless control from a single platform.

### features

- **20A Mechanically Latching Relays**
- **100 mA of Sinking Current per 0-10V Dimming Channel**
- **Graphic User Interface through a PC**
- **Networkable via Ethernet**
- **BACnet connectivity for BMS available via NXL-BMS accessory panel**
- **Built-in Real-Time-Clock (RTC) for scheduling**

### Specifications

#### Physical

NEMA/Type:	1 (3R available, add -3R to part number)
Mounting:	Surface Mount (suitable for Plenum Mount)
Operating Temperature:	14° to 122°F (-10°C to 55°C)

#### Electrical (Control Wiring)

Output Signal:	±24VAC, 500mA
Input Signal:	24VAC, Class II
Ethernet:	10/100 Ethernet TCP/IP Modbus TCP (BACnet via NXL-BMS) Requires UPT Cable Category 5 or greater Connection via PoE Port not Allowed
Max # of units:	250 (Ethernet)

#### Relays

UL/cUL Listed:	20A 300 VAC Ballast 20A 300/347 VAC General Use 16A 300 VAC Electronic Ballast ½ HP 110-125 VAC Motor 1½ HP 220-277 VAC Motor
----------------	---

#### Dimming Channels

0-10V Sinking Current:	100 mA per dimming channel
High Trim:	100% down to 50%
Low Trim:	0% up to 50%

### Additional accessories

NXL-OPC:	Outdoor Photocell Integration Panel, Remote Mounting (8"H x 8"W x 4"D)
NXL-00P5:	Dimming Expansion, (8) Channels of 0-10 Dimming (100mA Sinking per Channel) (8"H x 8"W x 4"D)
NXL-AVI:	A/V Integration, (8) Dry Contact Inputs (8"H x 8"W x 4"D)
NXL-BMS:	BACnet Protocol Conversion Panel for Building Management System (BMS) Integration (12"H x 12"W x 6"D)
NXL-AMP:	Amplifier Panel for NexLight Data Bus, Supports an additional 485 mA of system devices (12"H x 12"W x 6"D)

\*\*See individual accessory specification sheet for more information

## NXL-D8i



Alternate Available Part Numbers:  
NXL-D8a

### Included Components


- 8 CRC7000 20 Amp Relays
- 2 CRC4214 Dimming Control Units (4 Channels each)
- 1 CRC1201 IPC<sub>1</sub>
- 1 CRC2180 Relay Controller
- 1 TR-5024 Transformer
- 1 TB-2-6-6 Terminal Block Assembly
- 1 PA-240-1 Panel Assembly

### Physical Specifications

- NEMA/Type: 1 (3R available, add -3R to part #)
- Mounting: Surface Mount
- Dimensions: 24.00"H x 20.00"W x 6.00"D
- Weight: 47 lbs
- Addresses Available: 256
- Addresses Used: 16
- mA Available: 450
- mA Draw: 24
- Operating Temperature: 14° to 122°F (-10°C to 55°C)

<sup>1</sup> Alternate System Devices Available;  
Reference Part Number Information Table

## NXL-D16i

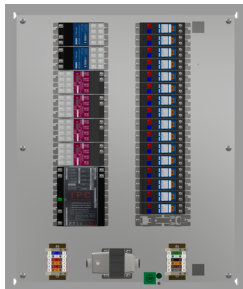

Alternate Available Part Numbers:  
NXL-D16a

### Included Components


- 16 CRC7000 20 Amp Relays
- 4 CRC4214 Dimming Control Units (4 Channels each)
- 1 CRC1201 IPC<sub>1</sub>
- 2 CRC2180 Relay Controller
- 1 TR-5024 Transformer
- 1 TB-2-6-6 Terminal Block Assembly
- 1 PA-240-1 Panel Assembly

### Physical Specifications

- NEMA/Type: 1 (3R available, add -3R to part #)
- Mounting: Surface Mount
- Dimensions: 24.00"H x 20.00"W x 6.00"D
- Weight: 51 lbs
- Addresses Available: 256
- Addresses Used: 32
- mA Available: 450
- mA Draw: 48
- Operating Temperature: 14° to 122°F (-10°C to 55°C)

<sup>1</sup> Alternate System Devices Available;  
Reference Part Number Information Table

## NXL-D24i

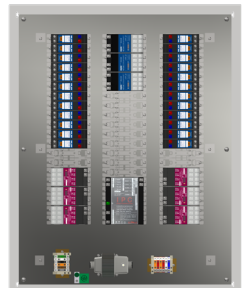

Alternate Available Part Numbers:  
NXL-D24a

### Included Components

- 24 CRC7000 20 Amp Relays
- 6 CRC4214 Dimming Control Units (4 Channels each)
- 1 CRC1201 IPC<sub>1</sub>
- 3 CRC2180 Relay Controller
- 1 TR-5024 Transformer
- 1 TB-2-6-6 Terminal Block Assembly
- 1 PA-300-1 Panel Assembly

### Physical Specifications

- NEMA/Type: 1 (3R available, add -3R to part #)
- Mounting: Surface Mount
- Dimensions: 30.00"H x 24.00"W x 6.00"D
- Weight: 72 lbs
- Addresses Available: 256
- Addresses Used: 48
- mA Available: 450
- mA Draw: 72
- Operating Temperature: 14° to 122°F (-10°C to 55°C)

<sup>1</sup> Alternate System Devices Available;  
Reference Part Number Information Table

## NXL-D32i



Alternate Available Part Numbers:  
NXL-D32a

### Included Components

- 32 CRC7000 20 Amp Relays
- 8 CRC4214 Dimming Control Units (4 Channels each)
- 1 CRC1201 IPC<sub>1</sub>
- 4 CRC2180 Relay Controller
- 1 TR-5024 Transformer
- 1 TB-2-6-6 Terminal Block Assembly
- 1 PA-360-1 Panel Assembly

### Physical Specifications


- NEMA/Type: 1 (3R available, add -3R to part #)
- Mounting: Surface Mount
- Dimensions: 36.00"H x 24.00"W x 6.00"D
- Weight: 85 lbs
- Addresses Available: 256
- Addresses Used: 64
- mA Available: 450
- mA Draw: 96
- Operating Temperature: 14° to 122°F (-10°C to 55°C)

<sup>1</sup> Alternate System Devices Available;  
Reference Part Number Information Table

# PART NUMBER INFORMATION TABLE

Part Number Information		
Example Used:	NXL-D8i	
(D) D Series Panel	(8) 20A Relays	(i) System Device CRC1201
Available Relay/Dimming Channel Quantities for the D Series Panels: 8, 16, 24, 32,		
Available System Devices for the D Series Panels: (i) CRC1201, (a) CRC6001*		
Component P/N	Description	Addresses Available
CRC1201	Large Capacity CPU	256
CRC6001	Data Bus Amplifier	0
*Use of the CRC6001 makes the D Series Panel an Auxiliary Panel		

## Wiring diagram

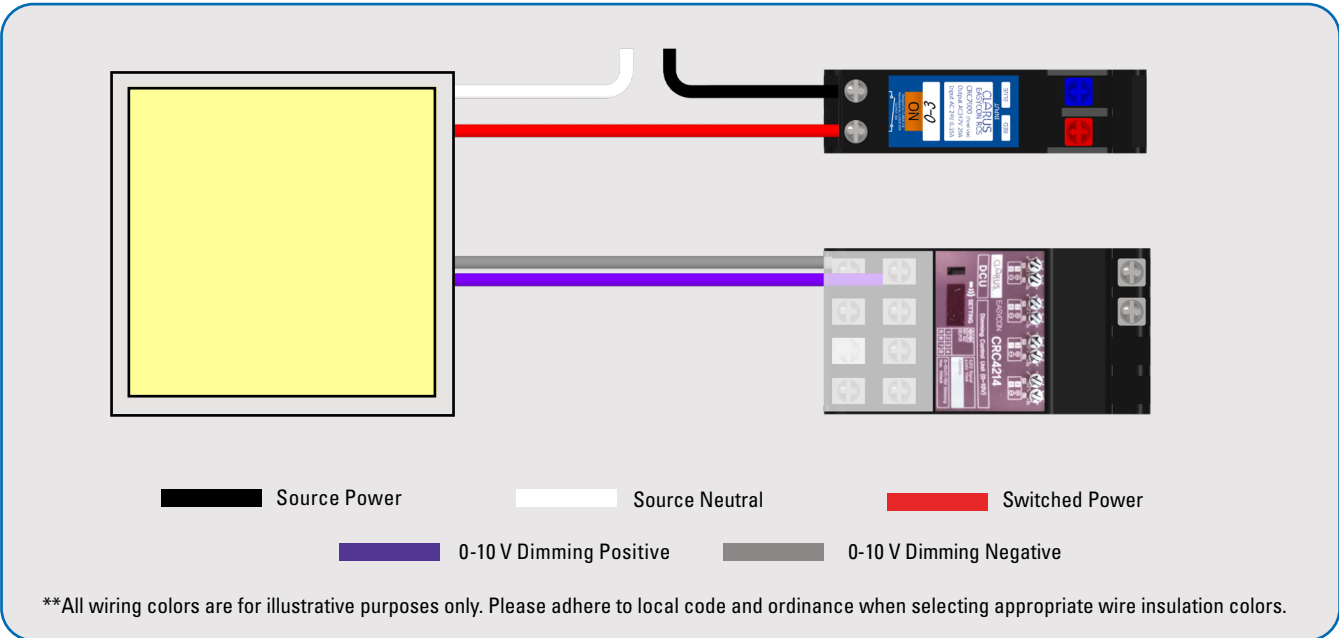

# PANEL SELECTION TABLE

PANEL SELECTED	PART #	DESCRIPTION	SYSTEM DEVICE USED	ADDRESSES AVAILABLE
	NXL-D8i	8 Relay Dimming Panel, Astronomic Timeclock (IPC) (24"H x 20"W x 6"D)	CRC1201	240
	NXL-D8a	8 Relay Dimming Panel, Astronomic Timeclock (AUX) (24"H x 20"W x 6"D)	CRC6001	0
	NXL-D16i	16 Relay Dimming Panel, Astronomic Timeclock (IPC) (24"H x 20"W x 6"D)	CRC1201	224
	NXL-D16a	16 Relay Dimming Panel, Astronomic Timeclock (AUX) (24"H x 20"W x 6"D)	CRC6001	0
	NXL-D24i	24 Relay Dimming Panel, Astronomic Timeclock (IPC) (30"H x 24"W x 6"D)	CRC1201	208
	NXL-D24a	24 Relay Dimming Panel, Astronomic Timeclock (AUX) (30"H x 24"W x 6"D)	CRC6001	0
	NXL-D32i	32 Relay Dimming Panel, Astronomic Timeclock (IPC) (30"H x 24"W x 6"D)	CRC1201	192
	NXL-D32a	32 Relay Dimming Panel, Astronomic Timeclock (AUX) (30"H x 24"W x 6"D)	CRC6001	0

