


RIB PANEL MOUNT MULTI-TAP TRANSFORMER



OVERVIEW

The RIB TR50VA004 Panel Mount Multi-Tap transformer is used to step down the line voltage on the primary side (120/240/277/480 VAC) to 24 VAC at the secondary. This provides power for 2-Wire devices that require additional 24VAC above what is provided by the 2-Wire communication bus.


WIRING

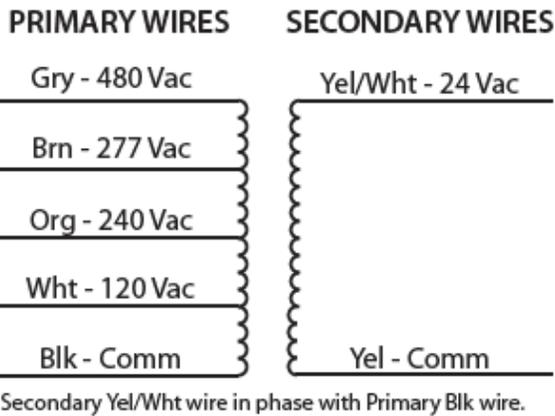

SPECIFICATIONS

- Size: 3.014"H x 2.513"W x 3.475"L (Overall)
(76.56mm x 3.83mm x 88.27mm)
- Weight: 3 lbs
- Mounting: Foot and Dual Threaded Hubs
- VA Rating: 50
- Frequency: 50/60 Hz
- Operating Temp: -30 to 140°F
- Approvals: Class 2 UL5085-3 Listed
C-UL, CE, RoHS
- Construction: Split-Bobbin
- MTBF: 100,000 Hours @ 77°F

DIMENSIONS

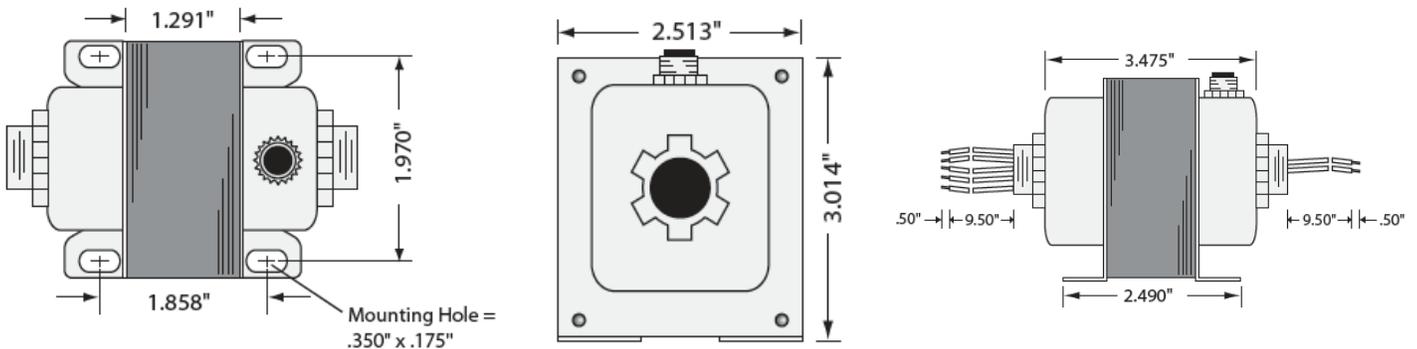

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE