

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

ECOSPEC® LINEAR DIMMING CONTROL MODULE PLENUM RATED (LDCM-PL) TAKES A 0-10V DIMMING SIGNAL AND A FIXED LINE VOLTAGE INPUT AND CONVERTS IT TO A REVERSE PHASE DIMMED OUTPUT FOR UP TO 1000W WITH A 277V LOAD AND 450W ON A 120V LOAD. ONE LDCM CAN BE USED PER RUN UP TO THE MAXIMUM WATTAGE. THE LDCM-PL IS RATED TO DIRECTLY MOUNT TO A JUNCTION BOX IN A PLENUM SPACE FOR EASIER INSTALLATIONS AND TO MEET BUILDING REQUIREMENTS.

FEATURES :

- DIMS REVERSE PHASE ONLY FIXTURES WITH 0-10V
- SIMPLE INSTALLATION
- DIRECT J-BOX MOUNT
- 120V AND 277V COMPATIBLE
- AUTO-SENSING VOLTAGE SWITCH
- 450W @120V, 1000W @277V
- PLENUM RATED
- ONE LDCM PER FIXTURE RUN

FOR USE WITH ECOSENSE® PRODUCTS **ONLY**. WARRANTY ONLY VALID WHEN USED WITH ECOSENSE LIGHTING PRODUCTS. FOR MORE INFORMATION ON TESTING YOUR PRODUCT WITH THE ECOSENSE LDCM PLEASE EMAIL INFO@ECOSENSELIGHTING.COM.



MODEL	VOLTAGE	CONTROL	COLOR
LDCM-PL	120-277 110VAC-120VAC, 277V Auto-Sensing Voltage Switch	010V - 0 - 10V	GR - Grey

EXAMPLE: LDCM-PL - 120-277 - 010V - GR

ELECTRICAL	POWER RATING	450W MAX @ 110-120V 1000W MAX @ 277V
	MAX FIXTURE RUN LENGTH	CALCULATE MAXIMUM RUN PER LDCM UNIT BASED ON THE POWER CONSUMPTION OF THE FIXTURE USED.
	OPERATING VOLTAGE	110VAC-120VAC, 277VAC - AUTO-SENSING VOLTAGE SWITCH
	OPERATING HERTZ	60 Hz
	STARTUP TEMPERATURE	-4°F TO 104°F (-20°C TO 40°C)
	OPERATING TEMPERATURE	-4°F TO 104°F (-20°C TO 40°C)
	STORAGE TEMPERATURE	-4°F TO 176°F (-40°C TO 80°C)
CONTROL	DIMMING	110-120VAC; REVERSE PHASE; CONVERTED FROM 0-10V CONTROLLER 277VAC; REVERSE PHASE; CONVERTED FROM 0-10V CONTROLLER
PHYSICAL	DIMENSIONS	W 3.4" x H 2" x L 7" ; (87mm x 50mm x 178mm)
	HOUSING / LENS	INJECTION MOLDED POLYCARBONATE
	CONNECTORS	LEAD WIRE 6" FROM CONDUIT
	WEIGHT	0.99 LBS (0.45 KG)
	ENVIRONMENT	ETL DAMP LOCATION
	MOUNTING OPTIONS:	CONDUIT MOUNTING FOR BOTH SIDES

RATING & CERTIFICATIONS ETL/cETL DAMP LOCATIONS



ECOSENSE LIGHTING INC.
837 NORTH SPRING STREET
SUITE 103
LOS ANGELES, CA 90012

P • 310.496.6255
F • 310.496.6256
T • 855.632.6736
855.6.ECOSEN


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT ECOSENSELIGHTING.COM FOR THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT ECOSENSELIGHTING.COM/IP-PORTFOLIO/
©2018 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE, THE ECOSENSE LOGO, TROY, TROY AND ECOSPEC ARE REGISTERED TRADEMARKS OF ECOSENSE LIGHTING INC.
RISE™, SLIM COVE™, FREEDOM TO CREATE™, MACRO™, FLIP-TO-FLAT™ ARE TRADEMARKS OF ECOSENSE LIGHTING INC.

ECOSENSELIGHTING.COM


1/2

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

DIMENSIONS

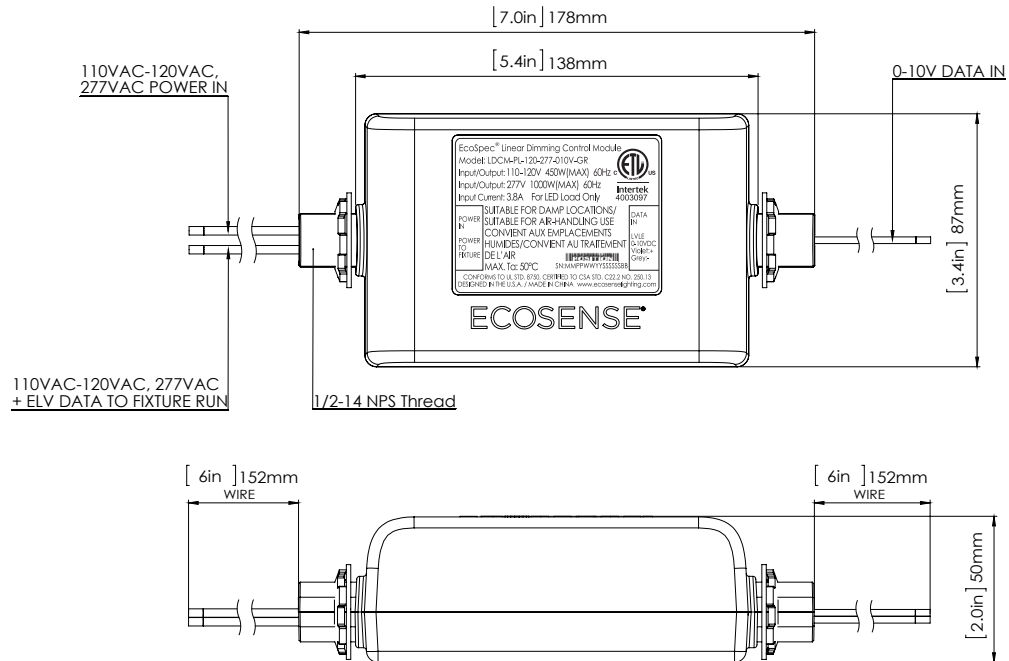

CONNECTIONS

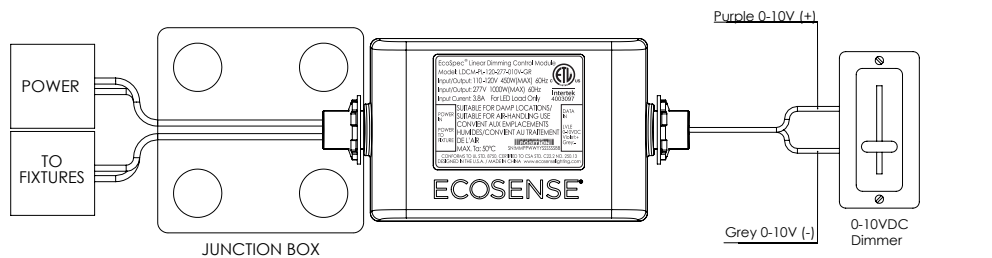

OR

